


DAC160

"DAC160": 16 BIT ANALOGUE PROGRAMMABLE OUTPUT

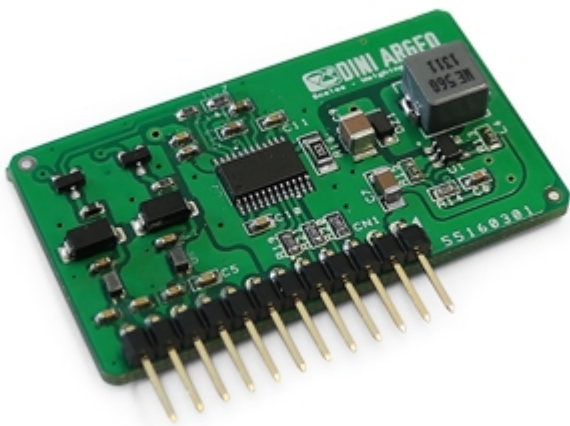

16 bit analogue output, in voltage or in current. Programmable as 0...5/0...10Vdc, 0...20/4...20mA through the **indicator** or through the PC with Dinitools. Particularly suitable for use with PLC's and in industrial environments.

Working in cooperation with:

WMS SCALES TECHNOLOGY SRL
FAGETU IERII, NR. 54 - 407321 - IARA - ROMANIA
Tel. 40745312637
office@centrul-de-cantare-si-balante.ro

The best solution
for advanced industrial
applications

TECHNICAL FEATURES:

- Output values programmable through the indicator or through the PC Dinitools: 0...5/0...10Vdc or 0...20/4...20mA.
- 16 bit resolution (65536 divisions).
- Update frequency: from 30 to 50Hz (depending on the weight indicator).
- Precision: minimum +/- 0.08%, typical 0.015% in relation to the F.S.O. of the analogue output (operating temperature 25°C).
- Maximum applicable resistance on the output in current: 300 ohm.
- Minimum applicable resistance on the output in voltage: 1 Kohm.
- Easily configurable through the indicator or through the PC using Dinitools.



www.diniargeo.com

“YOUR WORLDWIDE PARTNER FOR WEIGHING”

DINI ARGEO
FRANCE sarl
France

DINI ARGEO
GMBH
Germany

DINI ARGEO
UK Ltd
United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
China

DINI ARGEO
OCEANIA
Australia



COMPANY HEADQUARTERS

Via Della Fisica, 20
41042 Spezzano di Fiorano - Modena - Italy
Tel. +39.0536 843418

WMS SCALES TECHNOLOGY SRL

FAGETU IERII, NR. 54 - 407321 - IARA - ROMANIA

Tel. 40745312637

office@centrul-de-cantare-si-balante.ro

SALES AND TECHNICAL ASSISTANCE SERVICE

All the specifications and images can be subject to variations and upgrades without prior notice.